


ISOMETRIC VIEW

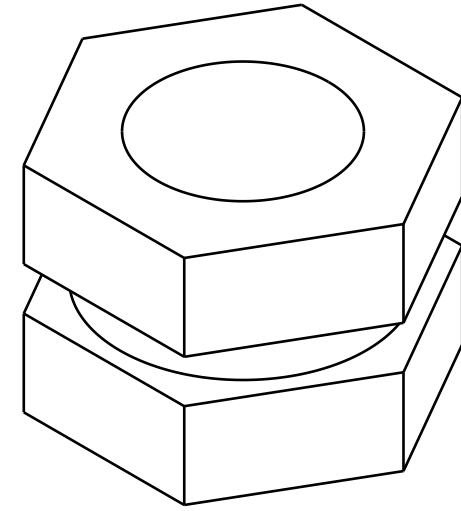

NOTE: THE THREADED BUSH MUST RESIST TO A TORQUE OF 21.5 N/m $\pm 15\%$

Permissible deviations from the nominal value d (mm)									
Nominal value	0.5≤d<3	3≤d<6	6≤d<30	30≤d<120	120≤d<400	400≤d<1000	1000≤d<2000	2000≤d<4000	Angle
Tolerance	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4	1°

Orhan Otomotiv	Aciklama (EXPLANATION)
A	08/11/2016 SPEC ADDED. (I.T) (P.P)
MODIF (ALTERATIONS)	

RESIM NO: (DRAWING NO) 760002	REV.: (IND.) A	ARAC TIPI: (VEHICLE TYPE) JXQ/TL4/ TL8	MIKTAR: (QTY) 1	TARİH: (DATE) 11/04/2016
PARÇA ADI: (PART NAME) THREADED BUSH		BITMIS URUN RESMI: (MAIN DRAWING) RENAULT	ÖLÇEK: (SCALE) 1:1	RESMİ ÇİZEN: (DRAWN BY) I. TURUNC
MALZEME: (MATERIAL) C4C		SARTNAME: (SPECIFICATION) EN 10263-2 47-01-000	FORMAT: (FORMAT) A3	KONTROL: (CONTROLLED BY) A. TANCREDI
İSLEM: (TREATMENT) Fe Zn-12 IV		AGIRLIK: (MASS) 7 g.	CİZİM PROGRAMI (DRAWING PRG.) V5	ONAY: (APPROVED BY) P. PONNET
EK BİLGİ: (ADDITIONAL INF.)				

