
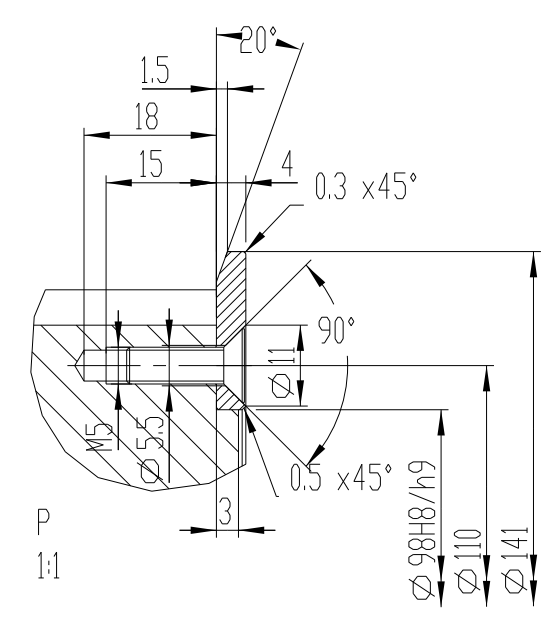
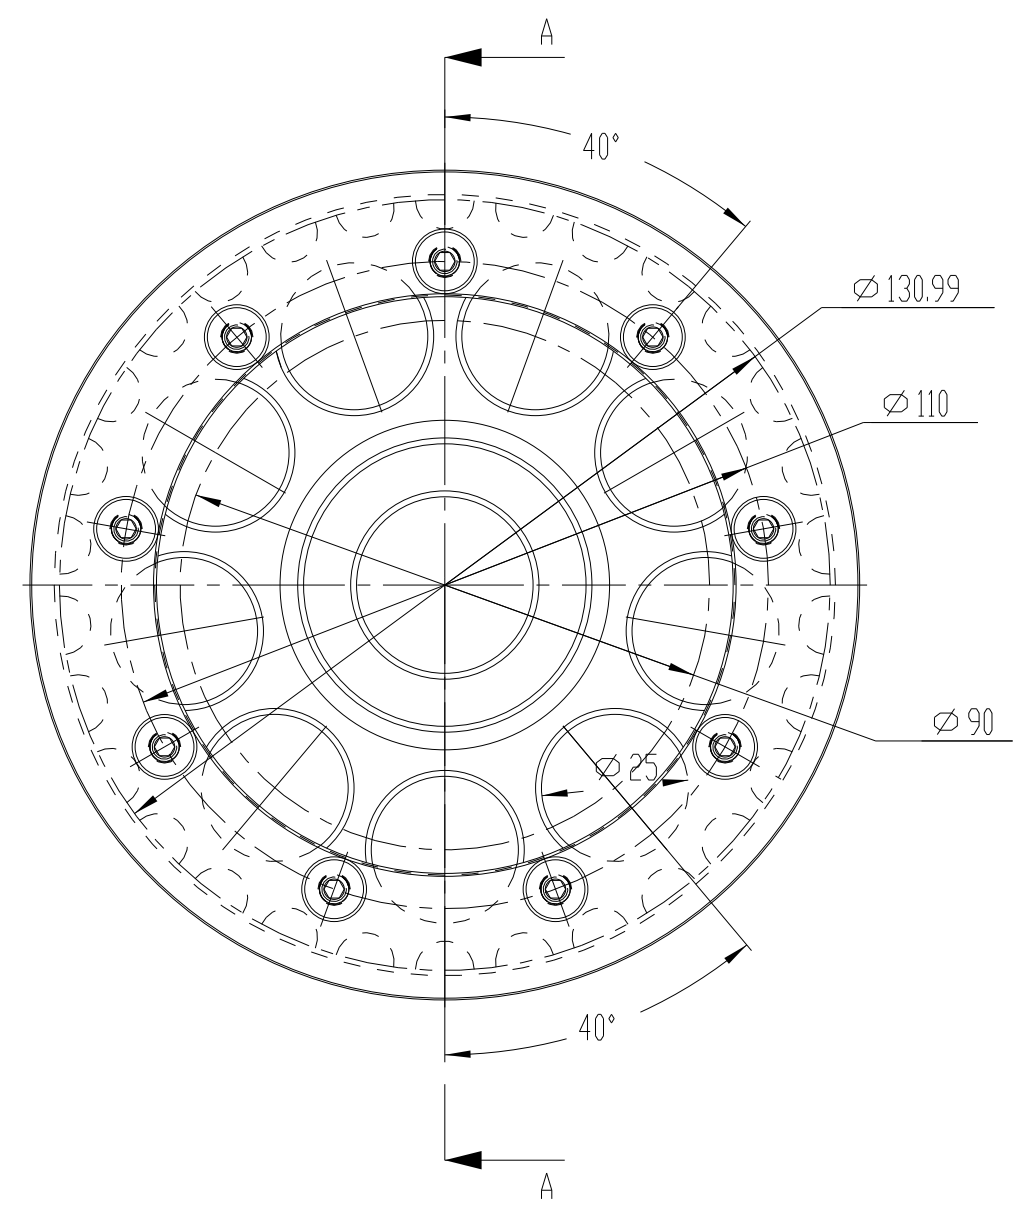


DEVIATIONS FOR DIMENSIONS WITHOUT TOLERANCES		
WELDING ENISO 13920 grade: B	LIN. & ANG. TOL. ENISO 22768-1 grade: m	GEOMETRICAL TOL. ENISO 22768-2 grade: K

6.3 / 0.8 sharpened /

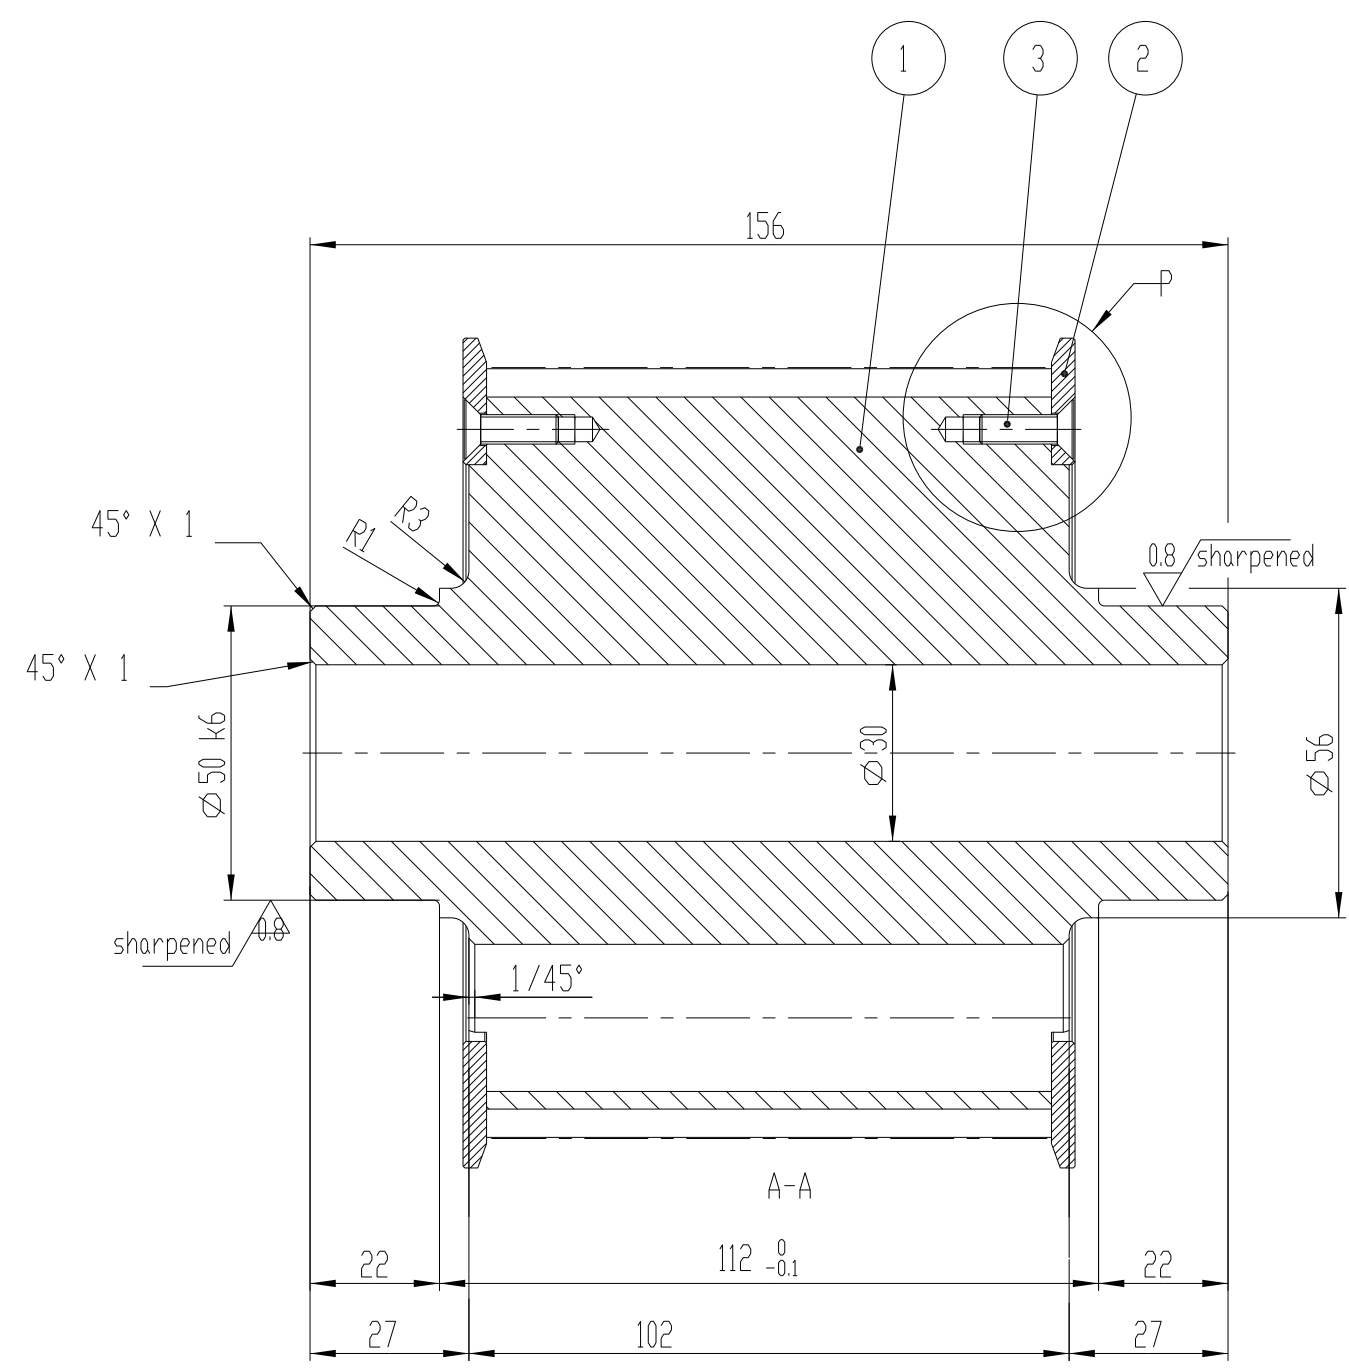

Note: Make from standard pulley 30-14M-85.  
Treated to Rm=850 N/mm2

3	Hexagon socket countersunk head screw M5x16	DIN 7991	8.8	0.0		
2	Pl.4xØ141		St 37-3	0.2		
1	PULLEY		Ck 60	6.1		
Itemref	Title/Name, designation, dimension, etc	Quantity	Drawing No.	material	mass (kg)	Note
	Date		Mass (kg)			
	Designed by 31-Mar-07 SELEZNEV		6.7			
	Checked by 31-Mar-08 BAZIN		Sheet 1/1			
Scale	TITLE					
4:5	PULLEY FREE					

**CONFIDENTIAL**

**CONFIDENTIAL**

Edition